



Greenough

Greenough Enterprises Co., Ltd.

LED luminaries Manufacturer and Exporter

LED Corn Bulb Light Specification

Product: GNH-CL-MN03 LED Corn Bulb Light

Model No.: GNH-CL-MN03-60W; GNH-CL-MN03-80W; GNH-CL-MN03-100W; GNH-CL-MN03-120W

Date: June 16th, 2015





I. Product Introduction

Characteristics

1. LED big bulb could displace the compact Traditional CFL light.
2. Unique structure, wide-angled (360°), Wide range of Irradiated Area.
3. Offer the well mixed facular, without the shadow result, long operating life and low lumens depreciation
4. Various lamp holder are available, a wide range of applications.(E26/E27 E39/E40).
5. Wide voltage AC85-300V or DC12-24V.
6. Epistar SMD3528 LED Chip, low life decaying rate.
7. Material: Soft Fiber or Aluminum PCB and heat sink.
8. Driver: Isolated, Internal driver, PF>0.9
9. Lifespan: 50,000hrs
10. Pass the CE and RoHS standard
11. Warranty: 3 years




II. Specifications, parameters

1. **LED Corn Bulb light technical parameters** (***) Note: Different CCT LEDS has different optical properties. The deviation is less than 5%(***)

Model	Power	LED Qty(pcs)	Dimension(mm)	Flux(lm)	LED Source	Voltage(AC)	Color temperature	Base
GNH-CL- MN03-60W	60W	900	φ105*260	5400-6000	Epistar SMD3528	AC85-300V DC12-24V	2700-8000K	E26/E27 E39/E40
GNH-CL- MN03-80W	80W	1120	φ105*295	7200-8000	Epistar SMD3528	AC85-300V	2700-8000K	E26/E27 E39/E40
GNH-CL- MN03-100W	100W	1456	φ105*315	9000-10000	Epistar SMD3528	AC85-300V	2700-8000K	E26/E27 E39/E40
GNH-CL- MN03-120W	120W	1792	φ112*340	10800-12000	Epistar SMD3528	AC85-300V	2700-8000K	E26/E27 E39/E40

2. LEDs Lumen Attenuation:

Testing condition: None break operation

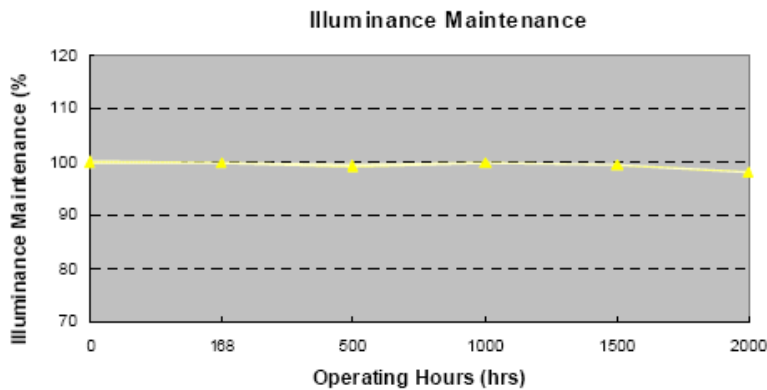

3. Packing details

Part No.	Inner Box	Outer Carton	Gross Weight	Net Weight
GNH-CL-MN03-60W	310*120*120mm	510*380*330mm 12pcs/carton	0.89KGS	0.385KGS
GNH-CL- MN03-80W	330*120*120mm	510*380*350mm 12pcs/carton	0.95KGS	0.375KGS
GNH-CL- MN03-100W	340*120*120mm	510*380*370mm 12pcs/carton	0.98KGS	0.66KGS
GNH-CL- MN03-120W	365*120*120mm	525*400*380mm 12pcs/carton	1.05KGS	0.75KGS

4. Application:

As usual they are widely used Hotels, Hospitals, Commercial Complexes, Conference / Meeting rooms, Factories & Offices, Residential / Institution Buildings, Schools and so on.

